


497-1695-00
BRAZED OPTION

D


C

B

A

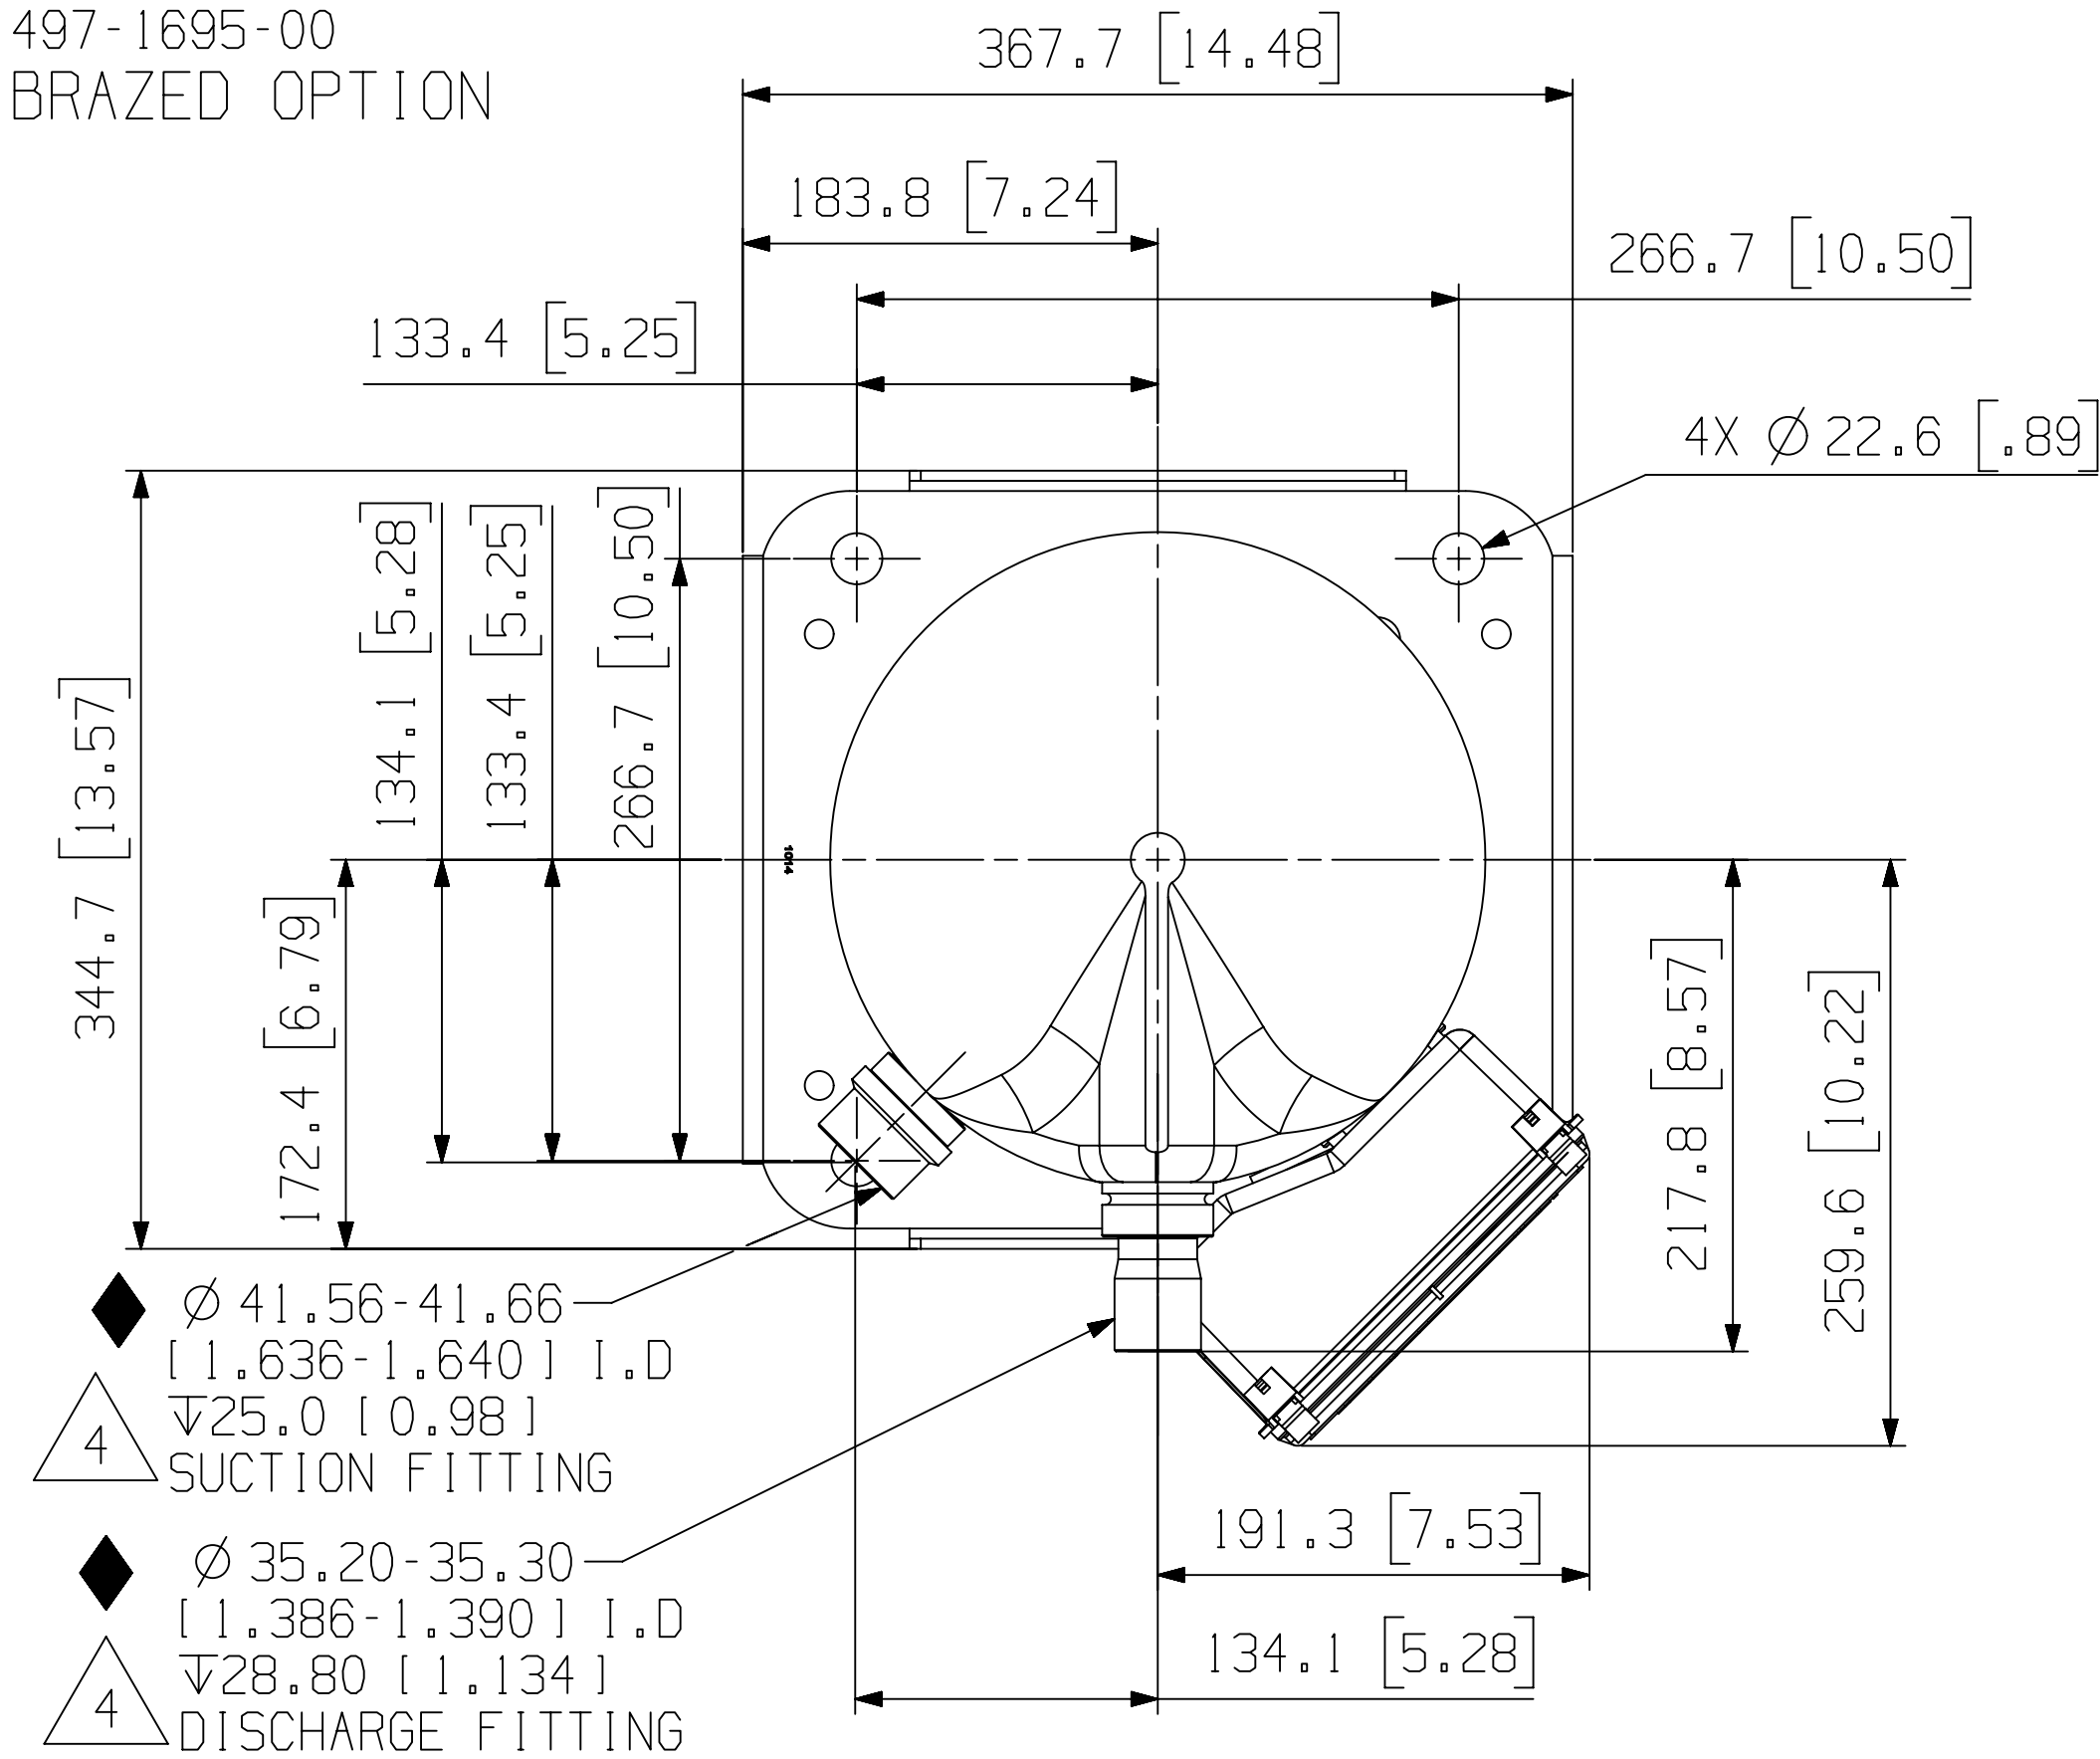


PART NUMBER	MODEL NUMBER	CUSTOMER CONNECTIONS
497-1695-00	ZR250KC/KCE	BRAZED
	ZP235KCE	
	ZH100KCE	
497-1695-01	ZR250KC/KCE	ROTALOCK
	ZP235KCE	
	ZH100KCE	

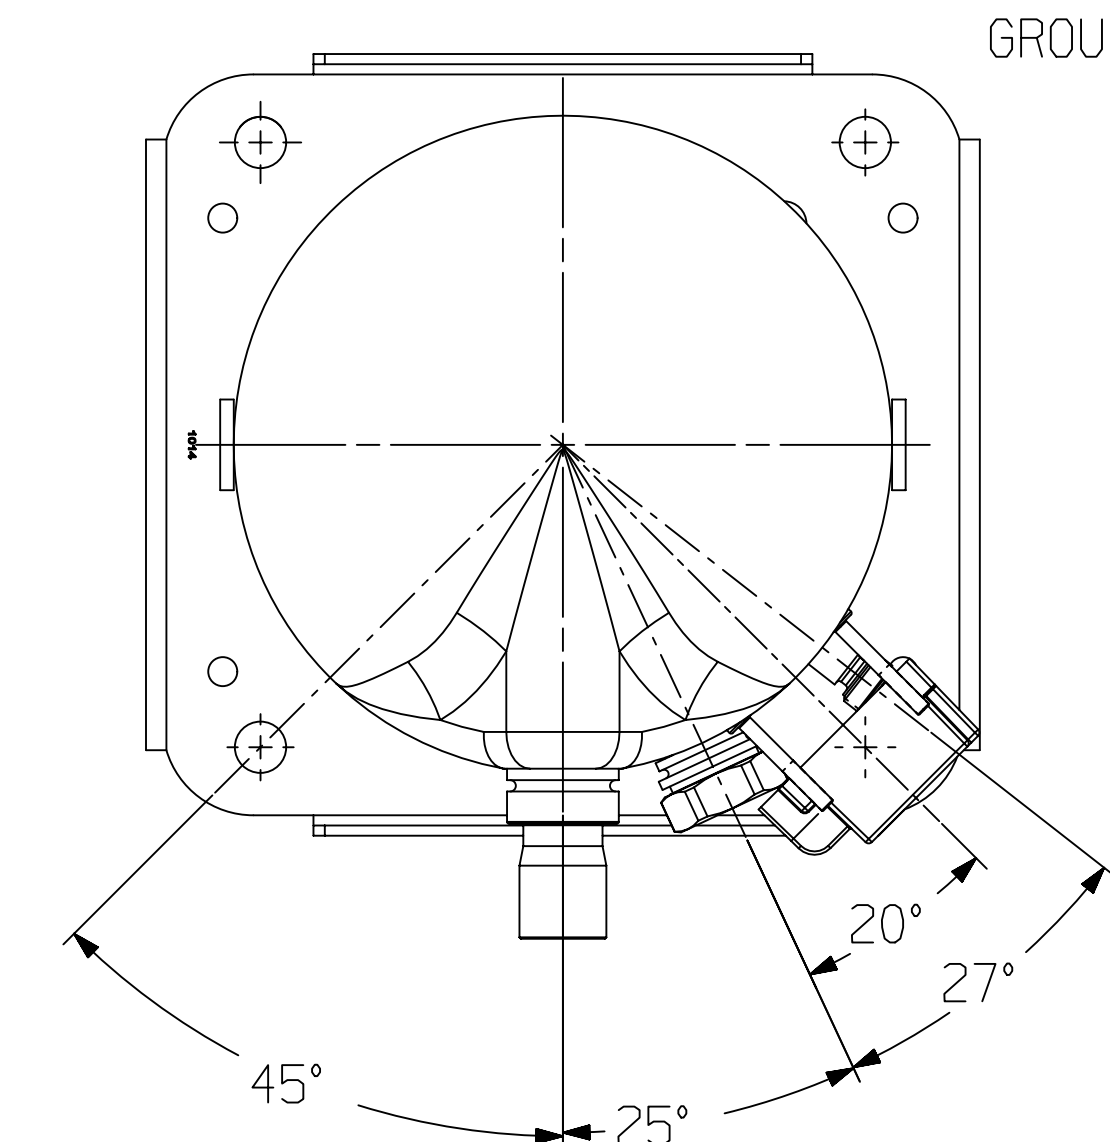


(VIEW W/O TERMINAL BOX)

497-1695-01
ROTALOCK OPTION

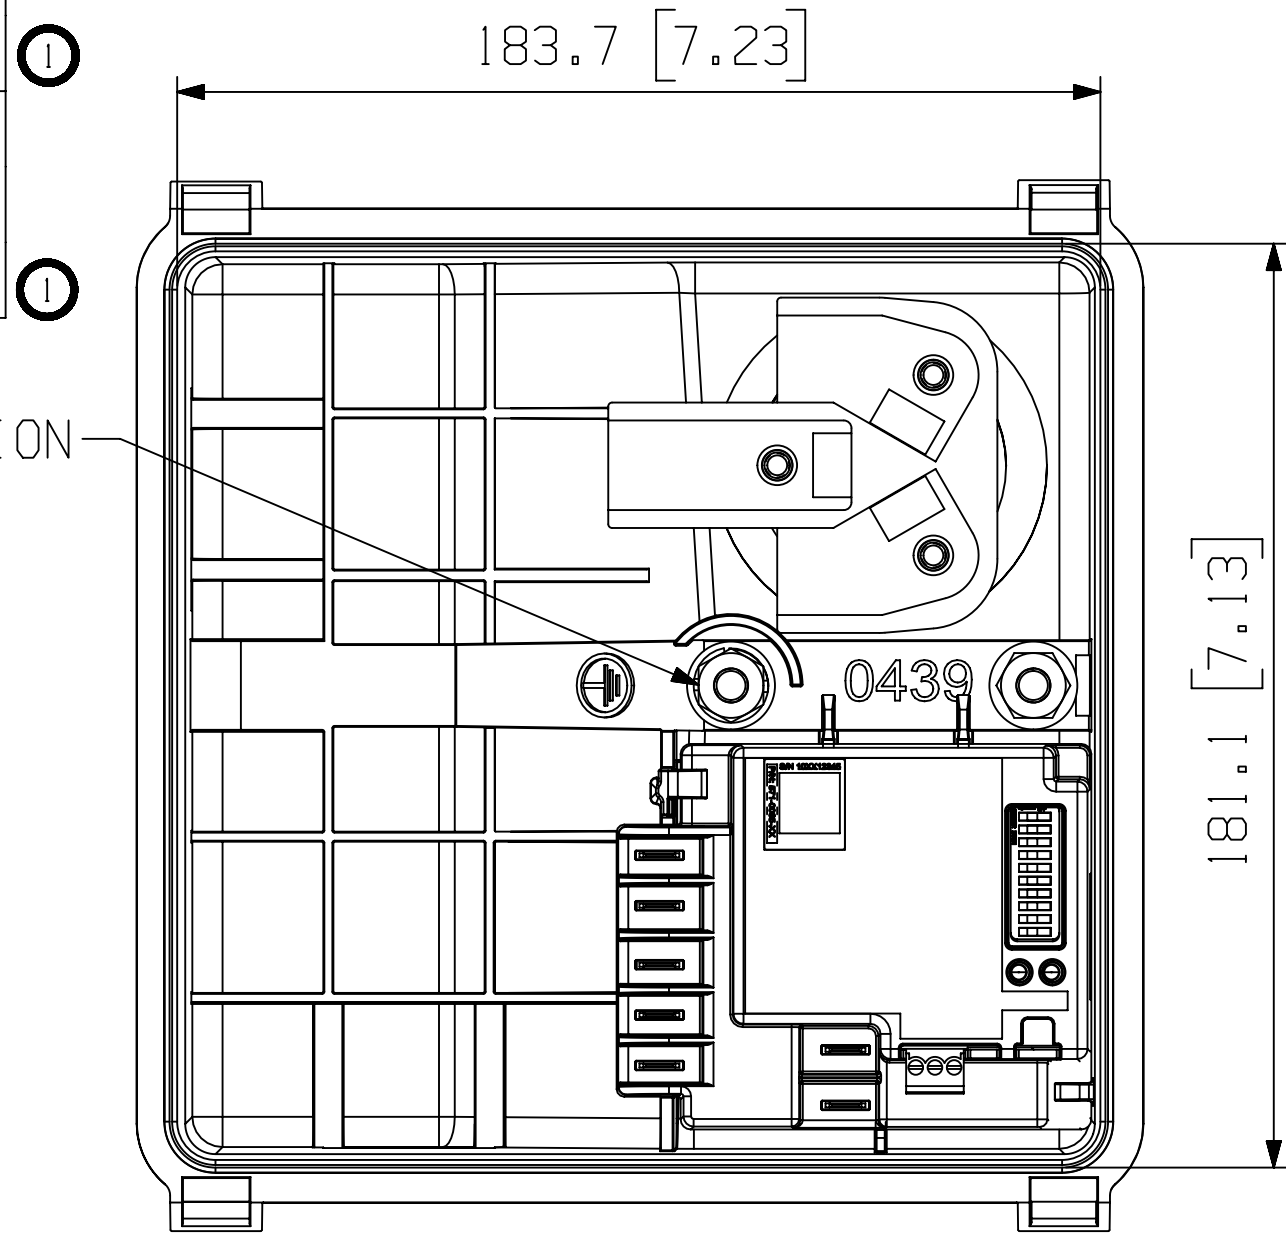


NOTES:

- ALL TOLERANCES $\pm 1.50 [0.060]$ UNLESS OTHERWISE SPECIFIED.
- DUE TO ACCUMULATED ASSEMBLY TOLERANCES THE LISTED COMPONENTS MAY VARY FROM THE MOUNTING HOLES AS SHOWN BELOW :
- ALL FITTINGS : $\pm 3.0 [0.12]$
- MOUNTING KIT : 527-0175-02
- TUBE ENDS MUST BE PLUGGED.
- 0.05 [0.002] MIN. THICK INTERIOR & EXTERIOR COPPER PLATED STEEL FITTING.

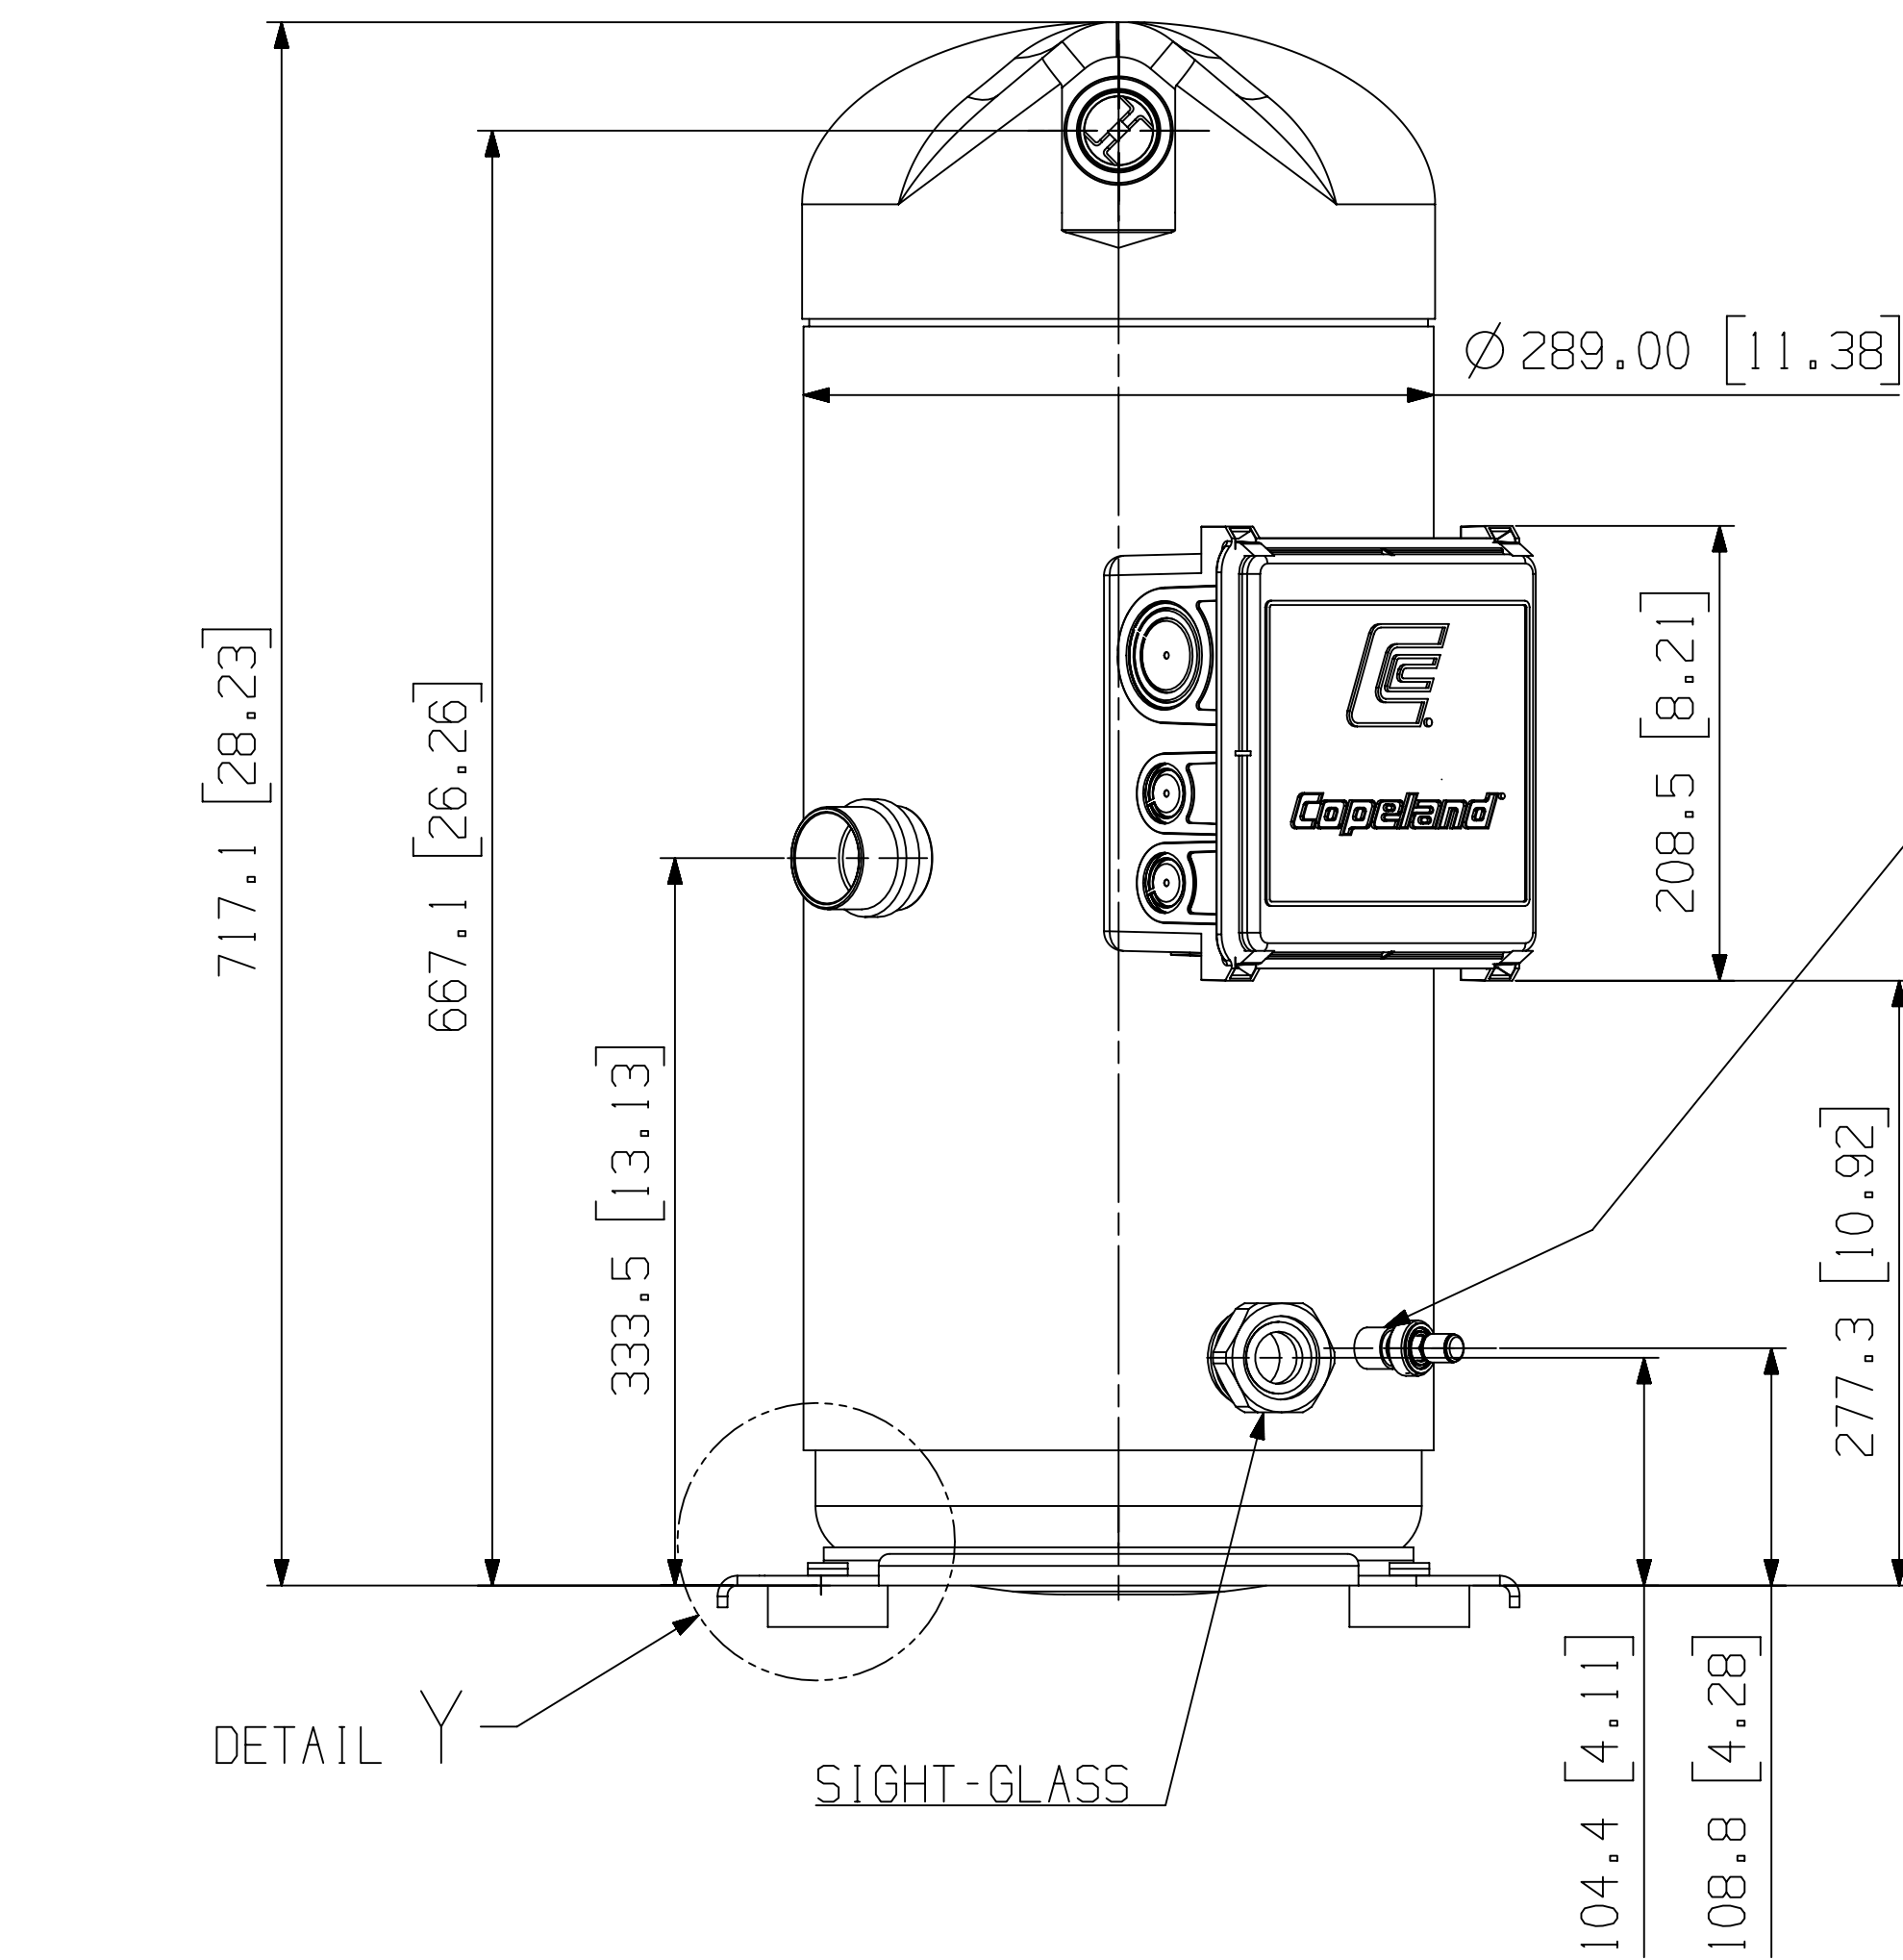

[2-1/4"-12 UN-2A] THREAD
ROTALOCK SUCTION
TORQUE RANGE: 189.8-199.9Nm
[1680-1770 IN-LBS]

Ø 9.60-9.78 ID
[Ø 0.378-0.385]
9.40 [0.370] MIN
M9 X 1.25-66 20.0
FITTING DESIGNED TO ALSO
ACCEPT ROTALOCK TPTL
OIL EQUALIZATION LINE
1-14 UNS-2A

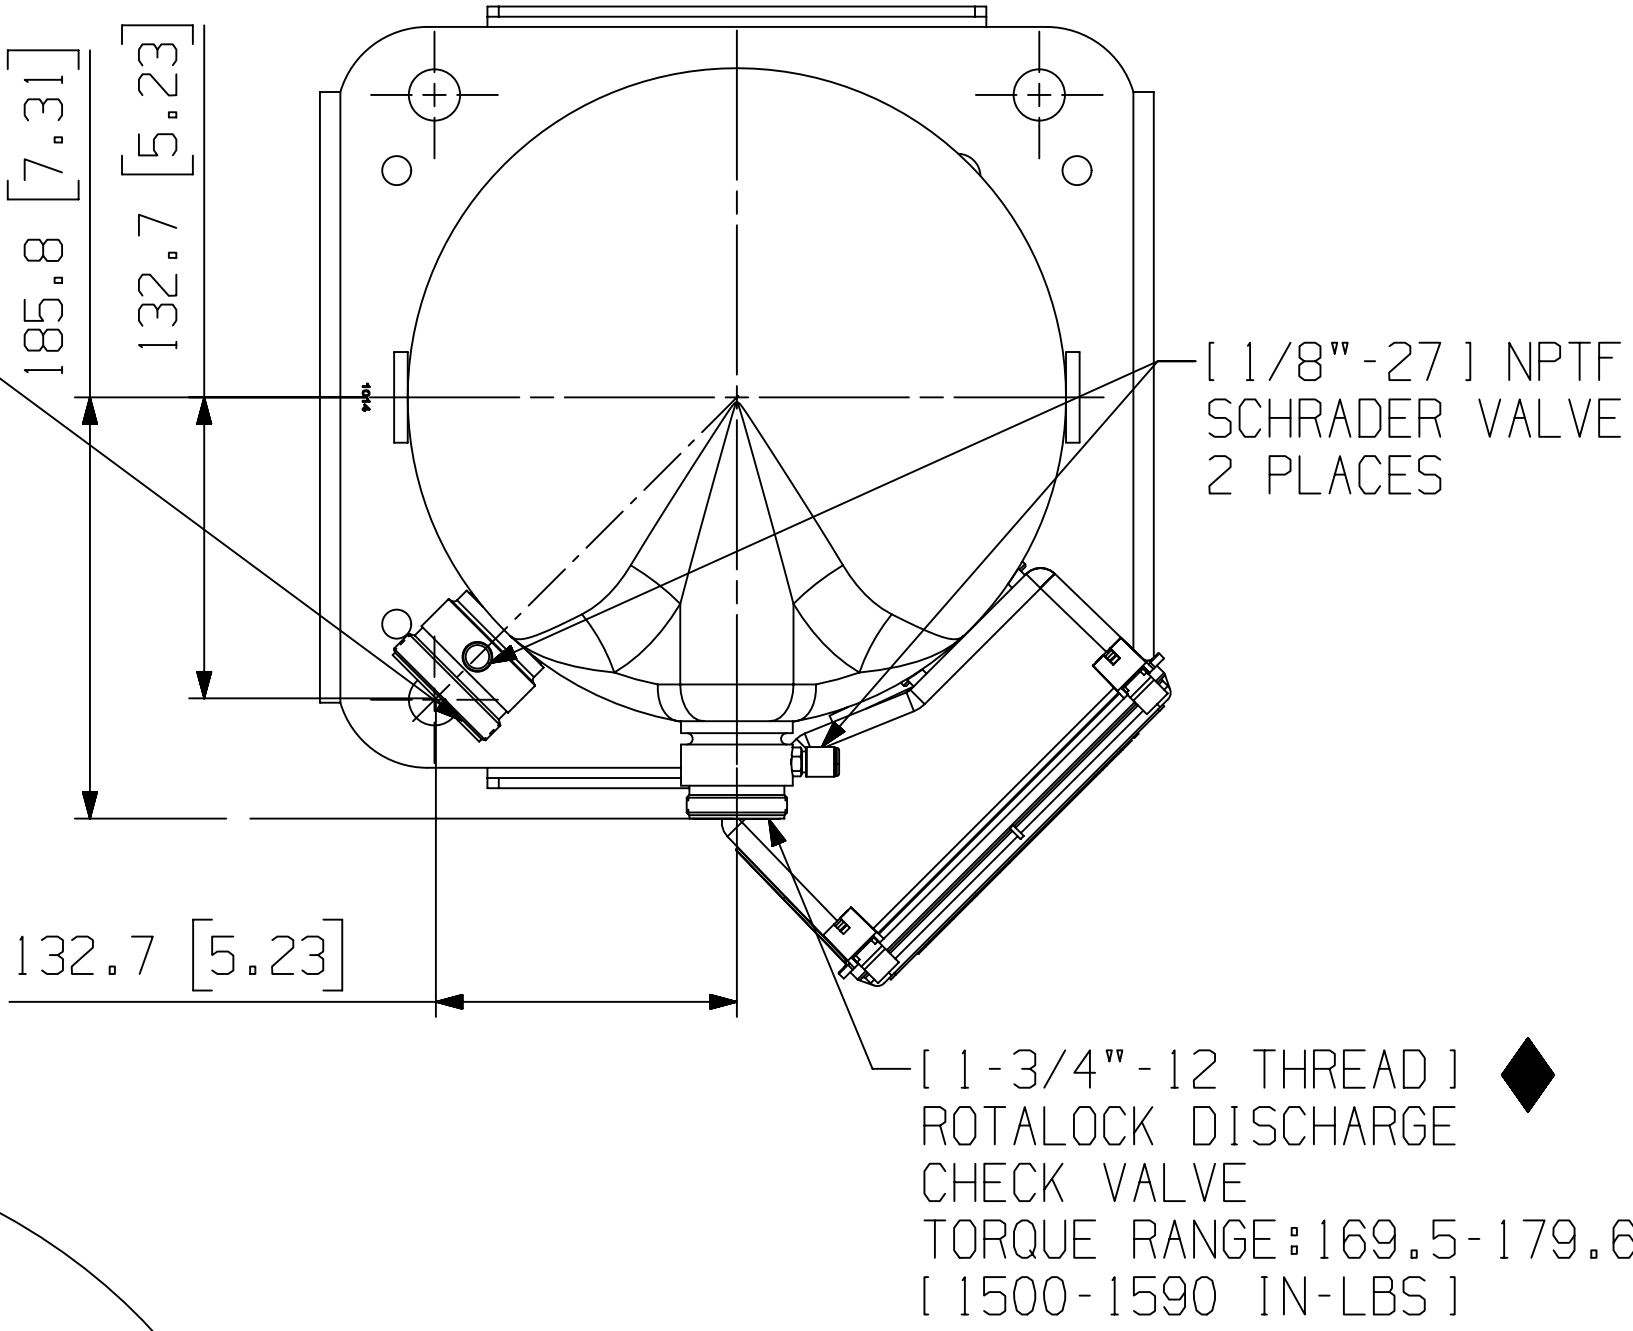

[1/8"-27] NPTF
SCHRADER VALVE
2 PLACES

[1-3/4"-12 THREAD]
ROTALOCK DISCHARGE
CHECK VALVE
TORQUE RANGE: 169.5-179.6Nm
[1500-1590 IN-LBS]

