



SUBMITTAL

| | | | |
|----------------|--|-------------------|------|
| Project Name: | | Project Location: | |
| Quote ID: | | Item #: | 1000 |
| Submitted For: | | Submitted On: | |
| Submitted By: | | Submitted From: | |
| Identity #: | | Tag: | |

 For Record

 For Approval

By: _____

Date: _____

General Product Information

| | | | |
|------------------------|--------------|--------------------------|-----------------|
| Product Family: | LCH | Compressor Brand: | Copeland |
| Application: | Outdoor | Compressor Type: | Scroll |
| Temperature Range: | Medium Temp | Compressor Hp: | 2 |
| Voltage: (Volts/Ph/Hz) | 208-230/3/60 | Compressor Model: | ZS15KAE-TF5-118 |
| Refrigerant Type: | R404A | Number of Compressor(s): | 1 |
| Piping: | Standard | Coil Type: | Microchannel |

NOTE : THIS EQUIPMENT IS PROHIBITED FROM USE IN CALIFORNIA WITH ANY REFRIGERANTS ON THE "LIST OF PROHIBITED SUBSTANCES" FOR THAT SPECIFIC END-USE, IN ACCORDANCE WITH CALIFORNIA CODE OF REGULATIONS, TITLE 17, SECTION 95374. THIS DISCLOSURE STATEMENT HAS BEEN REVIEWED AND APPROVED BY HEATCRAFT REFRIGERATION PRODUCTS LLC AND HEATCRAFT REFRIGERATION PRODUCTS LLC ATTESTS, UNDER PENALTY OF PERJURY, THAT THESE STATEMENTS ARE TRUE AND ACCURATE.

Technical Information

Performance Data

| Ambient Temperature (°F) | Saturated Suction Temperature (°F) | Capacity (BTU/H) | Altitude (ft) | AWEF Value |
|--------------------------|------------------------------------|------------------|---------------|------------|
| 95 | 25.0 | 20,700 | 0 | 7.6 |


Electrical Data

| Compressor(s) | | Fan Motor(s) | | | Electric Ratings | | | | | | |
|---------------|-----|--------------|------|-----|------------------|-------------------|----------------------|-----|------|----------------|---------------------|
| RLA | LRA | Quantity | Hp | FLA | Defrost Type | High or Low Amps? | Number of Contactors | MCA | MOPD | Evap. Fan Amps | Defrost Heater Amps |
| 9.6 | 58 | 2 | 1/15 | 1 | AIR DEFROST | NA | | 15 | 20 | 9 | 23 |

Unit Specifications

| Connections (in.) | | Receiver 90% Full (lbs) | | Fan Blade(s) Diameter (in) | Sound Data (dB) | Approx. Net Weight (lbs) |
|-------------------|---------|-------------------------|------------|----------------------------|-----------------|--------------------------|
| Liquid Line | Suction | Standard | Over Sized | | | |
| 0.5 | 0.875 | 14.0 | 20.0 | 14 | 63 | 221 |

Dimensional Drawing(s)

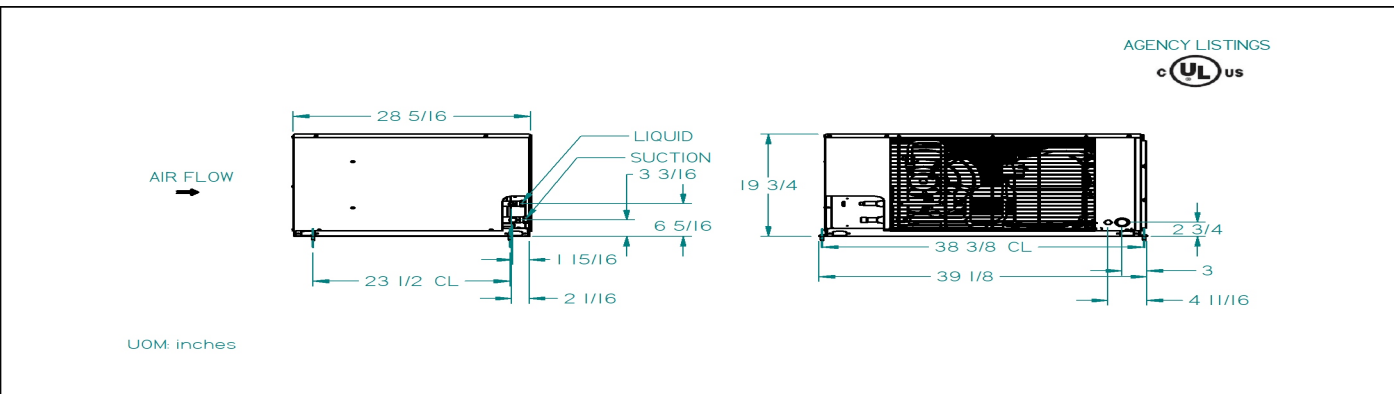



SUBMITTAL

| | | | |
|----------------|--|-------------------|------|
| Project Name: | | Project Location: | |
| Quote ID: | | Item #: | 1000 |
| Submitted For: | | Submitted On: | |
| Submitted By: | | Submitted From: | |
| Identity #: | | Tag: | |

Standard Features

CABINET AND CONSTRUCTION

- MICROCHANNEL COIL TECHNOLOGY STANDARD ON ALL UNITS
- PAINTED STEEL CABINETS FOR SUPERIOR STRENGTH AND CORROSION PROTECTION
- HEAVY DUTY, STEEL, 1-1/2 TALL BASE

SERVICEABILITY

- SUCTION SERVICE VALVES FOR HERMETIC AND SCROLL COMPRESSORS LOCATED OUTSIDE THE CABINET FOR QUICK INSTALLATIONS.
- RECEIVER WITH FUSIBLE PLUG, LIQUID SHUTOFF VALVE AND CHARGING PORT IS STANDARD
- LARGE ELECTRICAL PANEL FOR EASE OF ACCESS
- PREFABRICATED WIRING HARNESSSES FOR TIGHT CRIMP CONNECTIONS AND CONSISTENT LABELING
- UNIT STAYS ON IF THE HOOD IS REMOVED FOR SERVICING
- SIGHT GLASS IS EASILY VIEWABLE

QUALITY

- ALL UNITS ARE COMPLETELY LEAK TESTED IN A HELIUM ENVIRONMENT, BUMP TESTED AND ALLOWED TO CYCLE OFF ON THE HIGH AND LOW PRESSURE CONTROL. EACH UNIT HAS A COPY OF THE RUN DATA SHIPPED INSIDE THE ELECTRICAL PANEL
- ELECTRICAL CIRCUITS ARE COMPLETELY CHECKED FOR CONTINUITY
- PIPING IS LAID OUT TO MINIMIZE STRESS AND VIBRATION AND IS PRE-BENT TO ELIMINATE LEAKS
- ENCAPSULATED, AUTO-RESET, HIGH AND LOW PRESSURE CONTROLS TO ELIMINATE LEAKS (ADJUSTABLE LOW PRESSURE CONTROL STANDARD)


Options

Mounted Options

- | | |
|---|--|
| <ul style="list-style-type: none"> Brand Label - LARKIN Motor - PSC Receiver Options - STANDARD Liquid Line Options - FILTER DRIER AND SIGHT GLASS Discharge Line Options - HEAD PRESSURE VALVE 150# Fused Disconnect - NO FUSED DISCONNECT Crankcase Heater - CRANKCASE HEATER Pre Charged - NONE Hail Guard Factory Installed - NONE | <ul style="list-style-type: none"> Brand Label from Table - N/A Coil Selection - MICROCHANNEL COIL Defrost Timer Options - NO TIMER Suction Line Options - SUCTION TUBE ONLY Cabinet Selection - Painted Pressure Options - ADJUSTABLE LOW - FIXED HIGH Phase Loss Monitor - NONE Snow Legs - NONE ETO ID - N/A |
|---|--|

Minimum Unit Clearances

Walls or Obstructions for Horizontal Air Flow

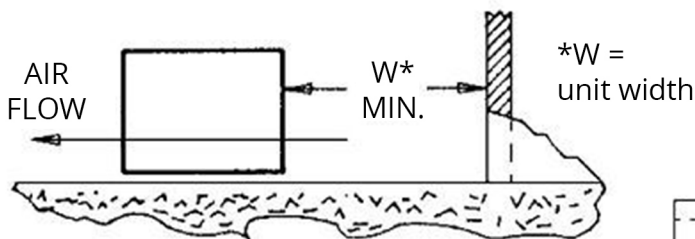

Multiple Units with Horizontal Air Flow

