

PROJECT NAME			
LOCATION			
ARCHITECT			
ENGINEER			
CONTRACTOR			
SUBMITTED BY	DA1	E	
	UNIT SUMMARY		
Quantity			
Unit Designation			
Model No.			
Total Cooling			
Sensible Cooling			
Air Ent. Evaporator			
Air Lvg. Evaporator			
Heating Input			
Heating Output			
CFM/ESP			
EER/SEER			
Electrical			
Minimum Ampacity			
MinMax. Breaker			
Net Unit Weight			
Accessory			
Catalog Form Number			
ACCESSORIES:	NOTES:		

Endeavor[™] Line (-)A15AZ iM Air Conditioner Cooling Efficiency: 15.2 SEER2/9.8 EER2 Nominal Sizes: 1.5 to 5 Ton [5.0 to 16.3 kW]

JOB NAME		 LOCATION
CONTRACTOR		ORDER NO
ENGINEER		 UNIT MODEL NO
SUBMITTED FOR	☐ APPROVAL	COIL MODEL NO
DATE		AIR HANDLER MODEL NO

UNIT DATA

COOLING PERFORMANCE

EFFICIENCY	SEER
TOTAL CAPACITY*	_MBH [kW]
SENSIBLE CAPACITY*	_MBH [kW]
OUTDOOR DESIGN TEMP	°F [°C] DB
TEMP. OF AIR ENTERING EVAPORATOR COIL	°F [°C] DB
POWER INPUT REQUIREMENT	
(*uses blower motor heat)	

HEATING PERFORMANCE

EFFICIENCY	HSPF
TOTAL CAPACITY*	MBH [kW]
OUTDOOR DESIGN TEMP	°F [°C] DB
TEMP. OF AIR ENTERING EVAPORATOR COIL	°F [°C] DB

SUPPLY AIR BLOWER PERFORMANCE

TOTAL AIR SUPPLY CFM [L/s]
TOTAL RESISTANCE EXTERNAL TO UNITIWG
BLOWER SPEEDRPM
POWER OUTPUT REQUIREMENT BHP
MOTOR RATING HP [W]
POWER INPUT REQUIREMENT kW

ELECTRICAL DATA

POWER SUPPLYHz	Z
TOTAL UNIT AMPACITY AMPS	3
MINIMUM WIRE SIZE AWG	à
MAXIMUM OVERCURRENT DEVICE FUSES/HACR BREAKER AMPS	3

CLEARANCES

ACCESS SIDE	24" [609.6 mm]
AIR INLETS	12" [304.8 mm]
ABOVE UNIT	60" [1524 mm]







FEATURES

- EcoNet® Enabled: Automatic system configuration and optimization
- PlusOne® Diagnostics & Bluetooth Connectivity: With the Contractor & EcoNet® Apps, built-in technology makes advanced set-up, monitoring, troubleshooting and repairing the product easier than ever before.
- PlusOne® Variable Speed Twin Rotary Compressor & Inverter Drive:
 - Features Inverter operation from 40 to 70% capacity or 100% capacity via line voltage with the EcoNet® Smart Thermostat
 - 3-speed operation when installed with a 24V two-stage thermostat
 - Provides precise temperature control, advanced humidity control and greater efficiency
- Swept Wing Fan Technology: Features quieter operation and improved unit acoustics
- 7mm Condenser Copper Coil: Requires less refrigerant allowing for a smaller and lighter footprint while enhancing reliability
- PlusOne® Expanded Value Space: 3 in. 4 in. 5 in. service valve space—provides a minimum working area of 27-square inches for easier access
- PlusOne® Triple Service Access: 15 in. wide, industry leading corner service access, two fastener, removeable corner and individual louver panels-makes repairs easier and faster

ACCESSORIES/OPTIONS


Compressor Crankcase Heater	۷
Low Ambient Control	
Compressor Sound Cover	1
Compressor Hard Start Kit	
Compressor Time Delay	
Low Pressure Control]
High Pressure Control]









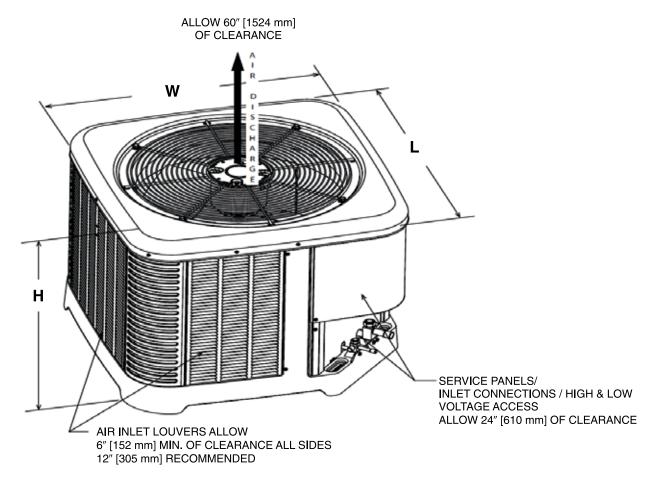

ST-A1226-02-00

Unit Dimensions

			\\ \DED	ATING		SHIPPING							
MODEL	OPERATING												
NO.	H (H	eight)	L (Le	ngth)	W (W	W (Width)		H (Height)		L (Length)		W (Width)	
	INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm	
(-)A15AZ24AJ3	27.00	686	29.75	756	29.75	756	28.50	724	32.38	822	32.38	822	
(-)A15AZ36AJ3	27.00	686	33.75	857	33.75	857	28.50	724	36.38	924	36.38	924	
(-)A15AZ48AJ3	31.00	787	33.75	857	33.75	857	32.50	826	36.38	924	36.38	924	
(-)A15AZ60AJ3	31.00	787	35.75	908	35.75	908	32.50	826	38.38	975	38.38	975	

[] Designates Metric Conversions

Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.

Rheem Sales Company, Inc. 5600 Old Greenwood Road Fort Smith, Arkansas 72908

© 2022 Rheem Manufacturing Company. Rheem and Ruud trademarks owned by Rheem Manufacturing Company.

"In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice."

PRINTED IN U.S.A. 9-22 QG FORM NO. X33-1603